

**Specification:**

Impedance ratio:  
Primary: 8.2k C.T. with 43% screen taps


DC resistance ( +/-15%):  
Primary: 161  
Secondary: 0.5

Primary leakage @ 1kHz: 6mH (typ.)

Interwinding capacitance @ 10kHz: 5nF (typ.)

Core material: grain orientated silicon steel  
Mass: 0.935kg

All dimensions +/- 0.5mm unless stated otherwise




Unit 5, Oxonian Park, Langford Locks,  
Kidlington, Oxfordshire. OX5 1FP  
Tel: (01865) 855085 Fax: (01865) 855075  
Website: [www.carnhill.co.uk](http://www.carnhill.co.uk)








Scale: nts

DESCRIPTION  
8k2 to 8 , 10W push-pull output transformer  
page 1 of 2



All dimensions in mm unless stated otherwise

ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
1	04/05/23	CS		<b>D29A18T</b>

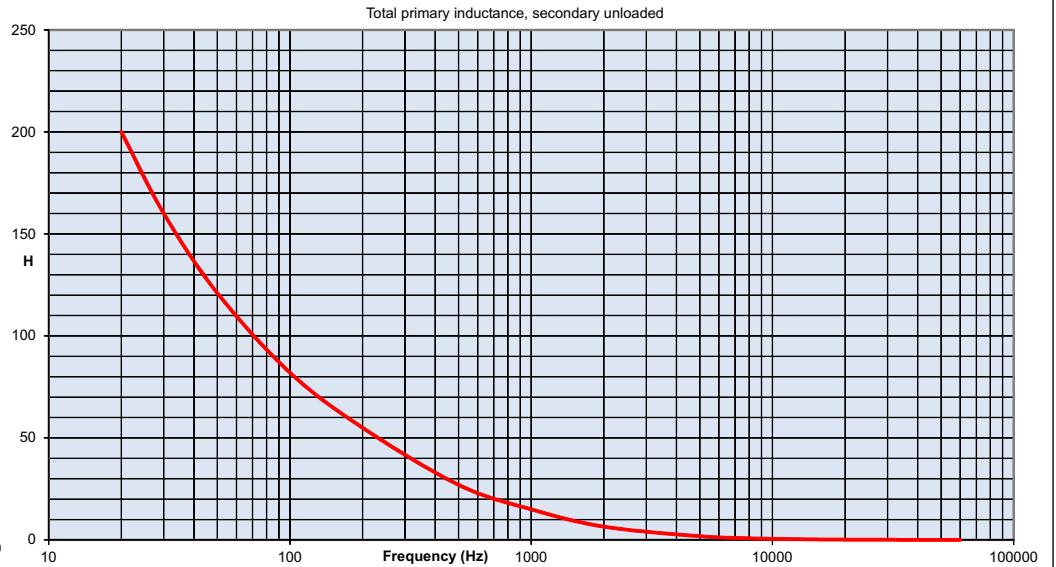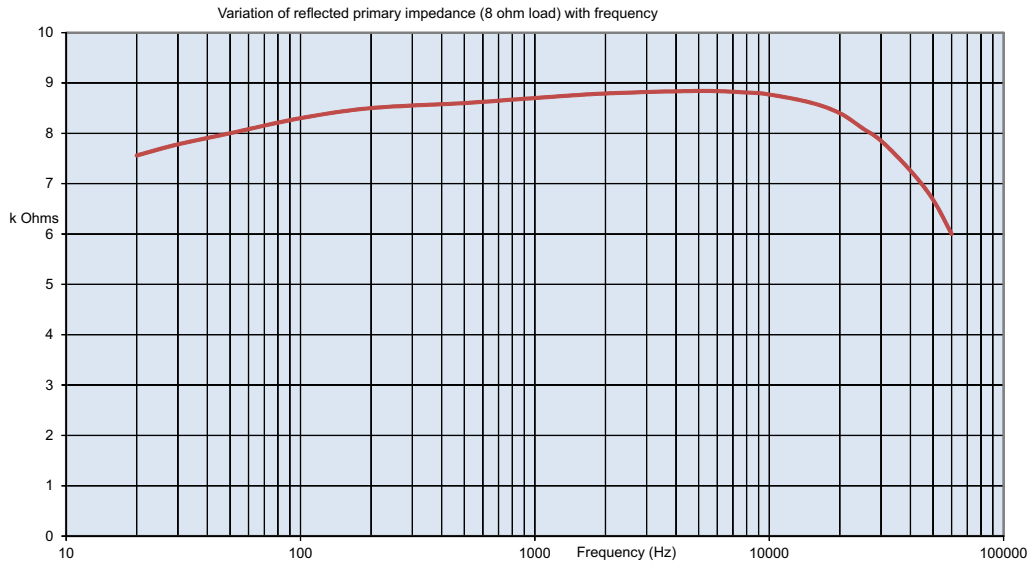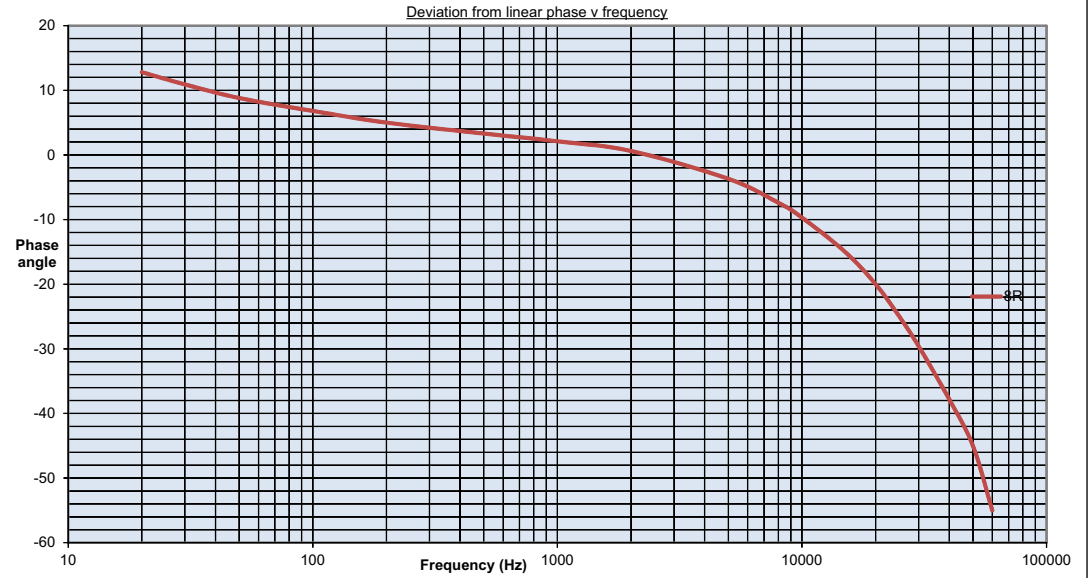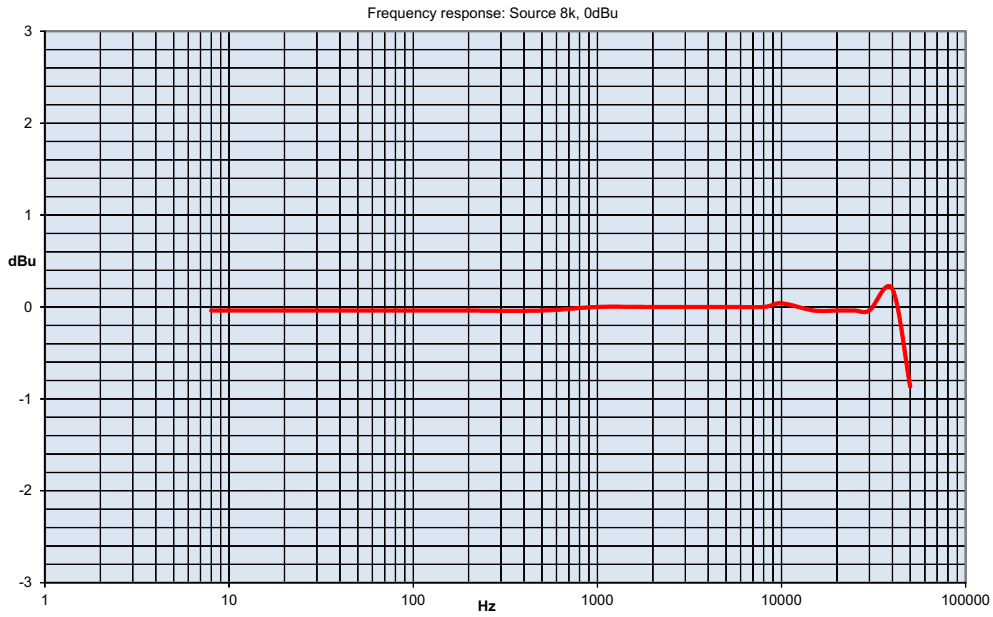


Unit 5, Oxonian Park, Langford Locks,  
Kidlington, Oxfordshire. OX5 1FP  
Tel: (01865) 855085 Fax: (01865) 855075  
Website: [www.carnhill.co.uk](http://www.carnhill.co.uk)



Scale: N.A.

8k2 to 8 , 10W push-pull output transformer  
page 2 of 2



Third Angle Projection

DESCRIPTION

ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
1	04/05/23	CS		<b>D29A18T</b>
