

Specification:

Impedance ratio:
 Primary: 5k
 Secondary: 4 / 8 / 16 ohms

DC resistance (+/-15%):
 Primary (6 - 10): 380
 Secondary (14 - 11): 1.23

Maximum power @ 80Hz: 4W
 Maximum DC: 45mA
 Primary leakage inductance @ 1kHz: 9mH (typ.)
 Interwinding capacitance @ 10kHz: 1.5nF (typ.)

Core material: grain orientated silicon steel
 Mass: 0.465kg






All dimensions +/- 0.3mm unless stated otherwise



Unit 5, Oxonian Park, Langford Locks,
 Kidlington, Oxfordshire. OX5 1FP
 Tel: (01865) 885085 Fax: (01865) 855075
 Website: www.carnhill.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED
4W output transformer for single-ended guitar amplifiers	1	09/09/19	CS	
	2	05/11/19	CS	
	3	28/07/20	CS	
	4	10/04/24	CS	

DRAWING NUMBER
R35A11F

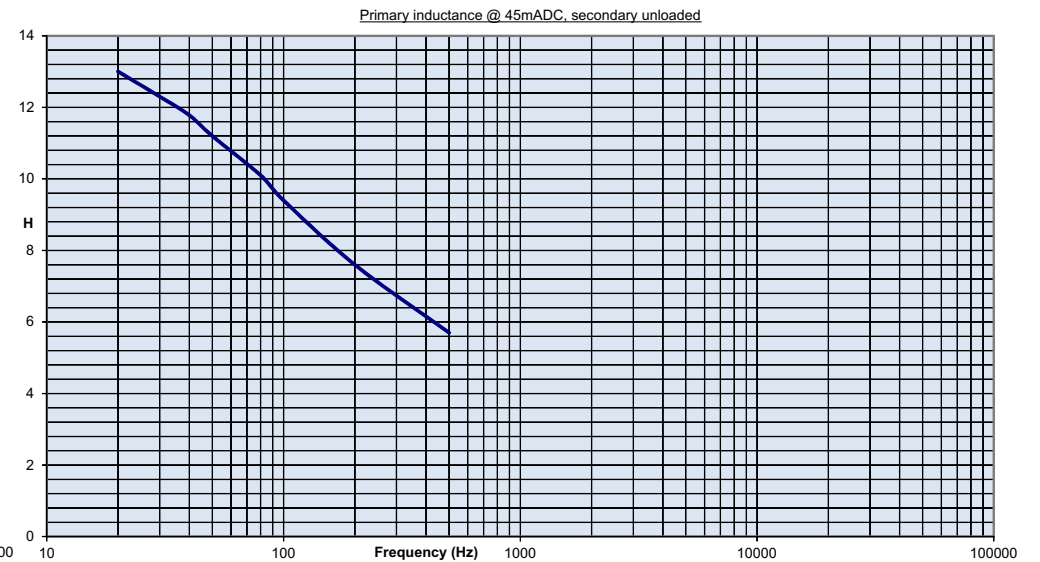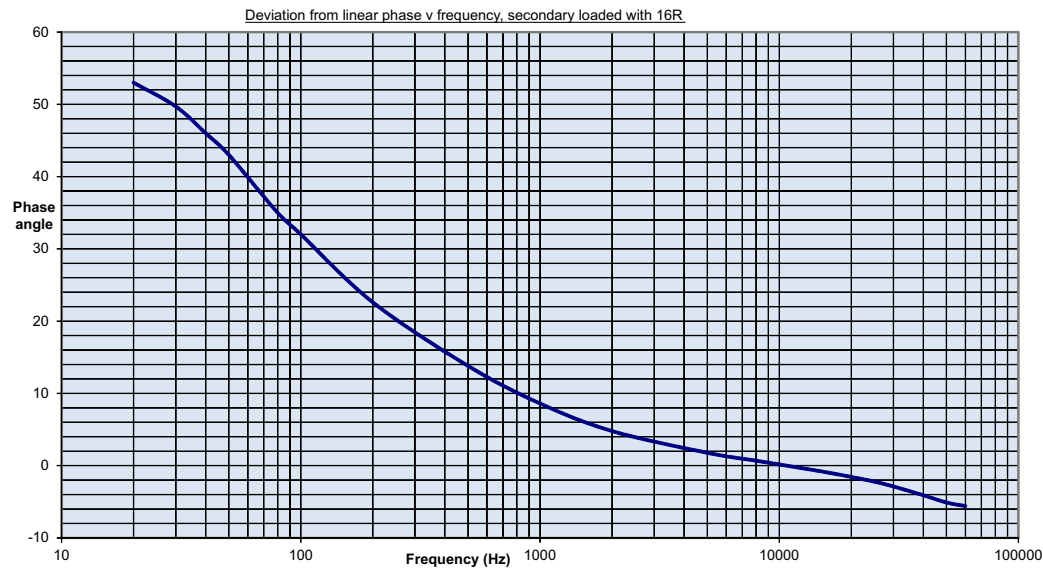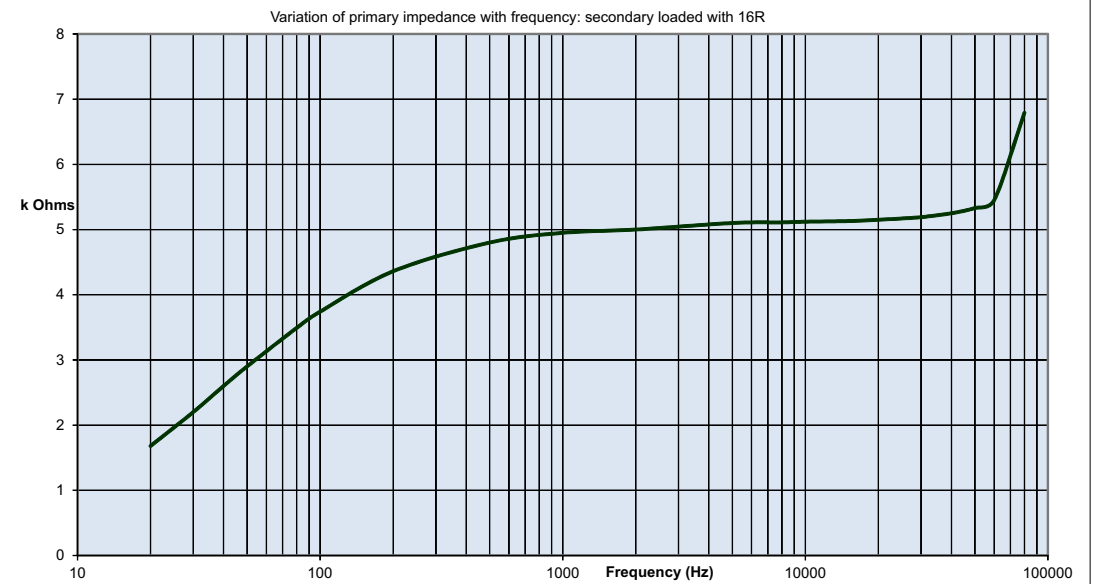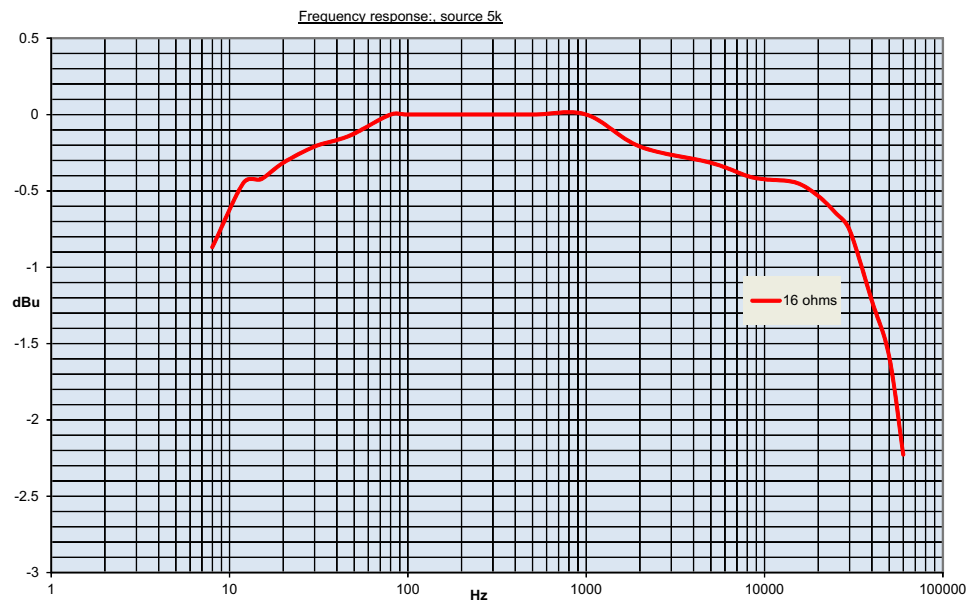

Unit 5, Oxonian Park, Langford Locks,
Kidlington, Oxfordshire. OX5 1FP
Tel: (01865) 885085 Fax: (01865) 855075
Website: www.carnhill.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED
4W output transformer for single-ended guitar amplifiers	1	09/09/19	CS	
	2	05/11/19	CS	
	3	28/07/20	CS	
	4	10/04/24	CS	

DRAWING NUMBER

R35A11F

Scale: 1 to 1

All dimensions in mm unless stated otherwise