

Specification:


Impedance ratio:
 Primary: 3k or 2k5
 Secondary: 4 / 8 / 16 ohms

DC resistance (+/-15%):
 3k: 43
 2k5: 39
 (12 - 7): 0.36

Maximum load @ 80Hz: 15W

Core material: grain orientated silicon steel
 Mass: 1.3kg

All dimensions +/- 0.5mm unless stated otherwise



Unit 5, Oxonian Park, Langford Locks,
 Kidlington, Oxfordshire. OX5 1FP
 Tel: (01865) 855085 Fax: (01865) 855075
 Website: www.carnhill.co.uk








Scale: nts

DESCRIPTION
 15W guitar amplifier output transformer
 single-ended, 3k primary

All dimensions in mm unless stated otherwise

ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
1	09/09/19	CS		V29A04F
3	10/02/20	CS		
4	11/08/20	CS		
5	10/04/24	CS		

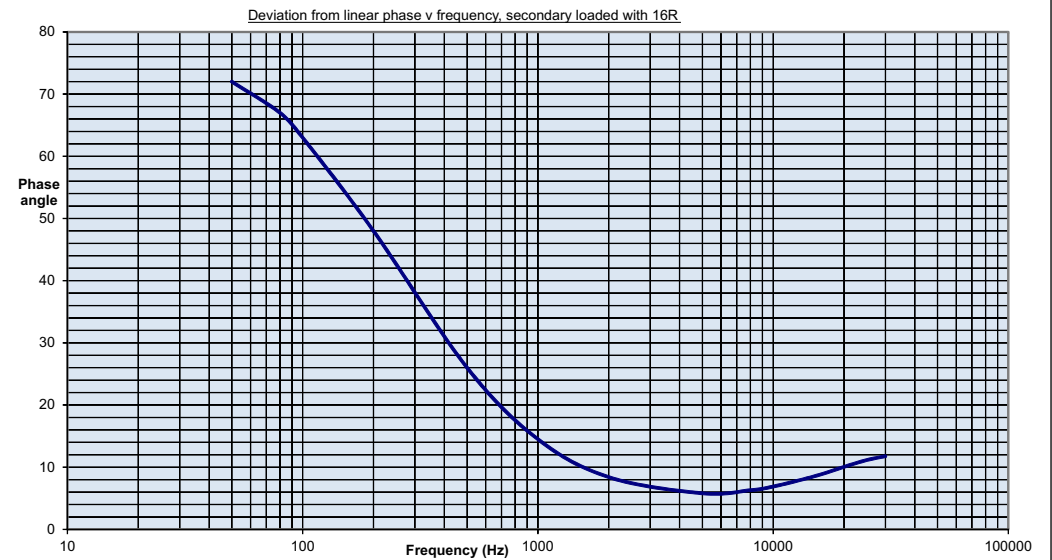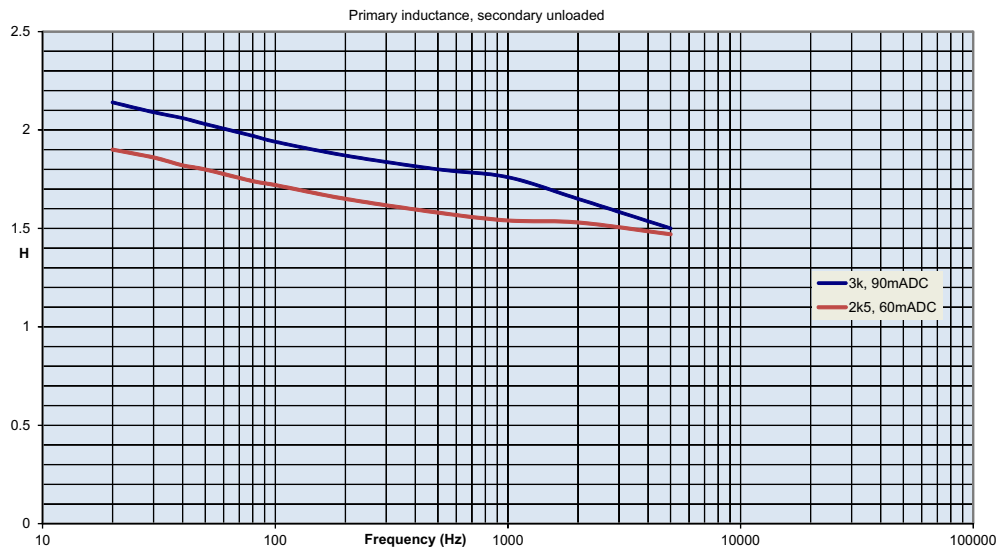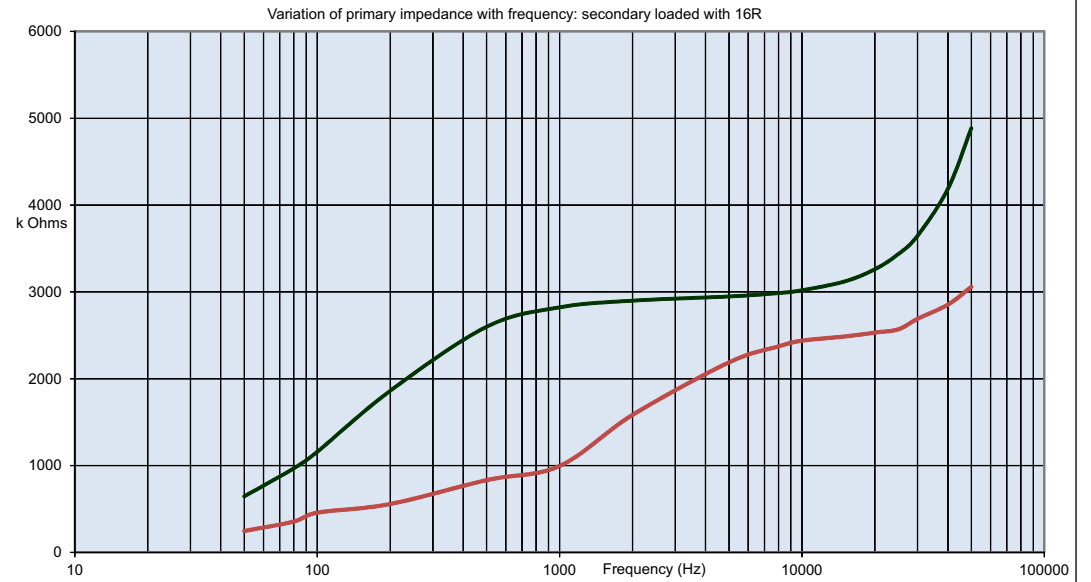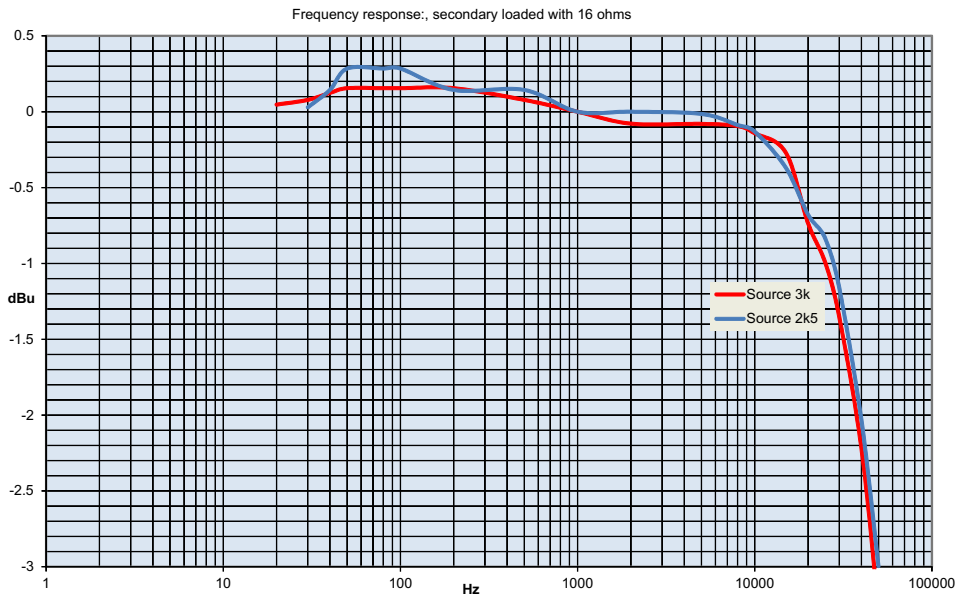

Unit 5, Oxonian Park, Langford Locks,
Kidlington, Oxfordshire. OX5 1FP
Tel: (01865) 855085 Fax: (01865) 855075
Website: www.carnhill.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
15W guitar amplifier output transformer single-ended, 3k primary	1	09/09/19	CS		V29A04F
	3	10/02/20	CS		
	4	11/08/20	CS		
	5	10/04/24	CS		
	Scale: nts	All dimensions in mm unless stated otherwise			