
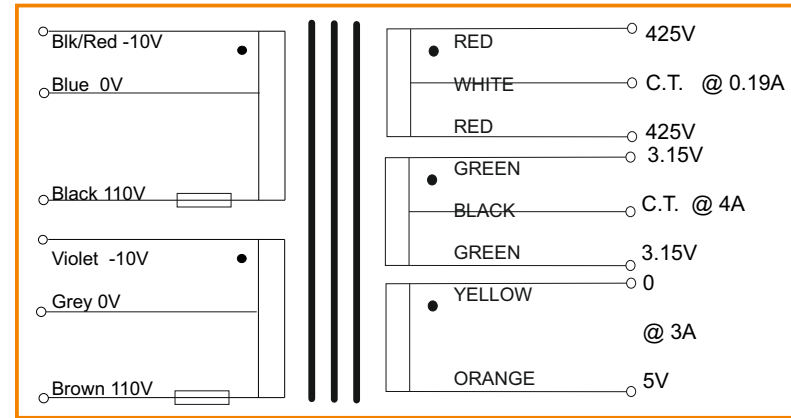
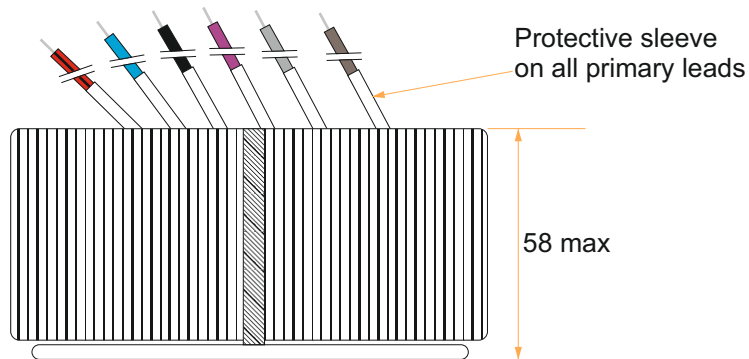


All flex leads 300mm & stripped and tinned 5mm

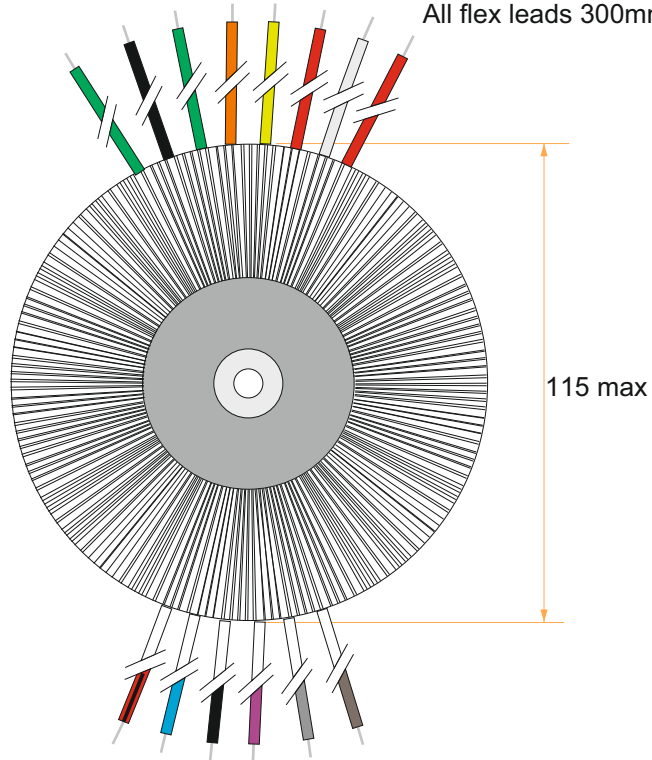

Always use both primaries and insulate unused leads
 Primaries protected with single shot thermal fuses

Input voltage:

110V (primaries in parallel): link blue to grey and link primary black to brown
 Mains supply connected across (violet+red/blk) and (brown+black)

220V: link primary black to grey, connect mains supply across blue and brown

230V: link primary black to violet, connect mains supply across blue and brown

240V: link primary black to violet, connect mains supply across blk/red and brown

Electrical specification:

Input range : 110V - 240V @ 50/60Hz

Open circuit output voltages:

Red - White - Red: 461V - 0 - 461V

Green - Black - Green: 3.3V - 0 - 3.3V

Yellow - Orange: 5.6V

Magnetising current @ 240V: 9mA (typ.)

Isolation (primaries to secondaries): 4kV, 2mA for 2s

Designed and manufactured in accordance with EN 61558

Supplied with full mounting hardware

Unit mass: 2.48kg

DANGER: HIGH VOLTAGE OUTPUT




vigortronix

VIGORTRONIX LTD
 16 De Havilland Way
 Windrush Park, Witney
 Oxon, OX29 0YG, UK
 Tel: +44 (0)1993 777570
 Fax: +44 (0)1993 777580
 www.vigortronix.com

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
200VA mains toroidal transformer	1	20/04/26	CS		VTX-146-0001-200



Scale: nts



All dimensions in mm unless stated otherwise